


# LIFTING TECHNOLOGY

## AXLE JACK

**AL II 2.0 PH**  
VP 985044

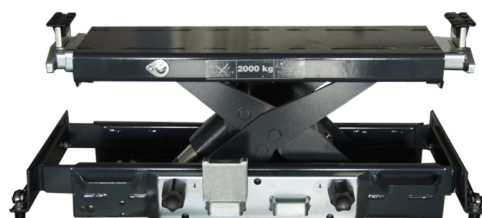

### AL II 2.0 PH

#### VP 985044

The axle jack has proved successful thanks to its robust, tried and tested technology and is suitable for a load capacity of up to 2.0 t. Operation is either via manual hydraulic or hydro-pneumatic system. The axle jack can be supplemented by a wide range of accessories.

#### PRODUCT DETAILS/ACCESSORIES

Powder coating in RAL 7016, anthracite  
incl. carriage  
incl. air supply set (spiral hose, guide rope)

incl. 2 rubber pads for lifting brackets  
incl. 3 lift extenders measuring 10 / 45 / 85 mm

#### TECHNICAL DATA

Load capacity	2000 kg at 8.5 bar
Min. / max. operating pressure	8.5 bar / 12 bar
Minimum air quantity	500 l/min
Stroke (effective stroke)	250 mm
Extension length	780 - 1610 mm
Max. protrusion above runway	70 mm

#### ACCESSORIES

VZ 975587 Support Extension 130 mm (2 pcs.)  
VZ 975597 Plug-In Type Hard Rubber Chocks h = 50 mm  
VZ 975598 Lifting saddle height adjust. for vehicle center support with Axle Lift AL II  
VZ 975711 Support for 3-Wheelers and Trailer Stabiliser Wheels  
VZ 975894 Extender set Transporter for Axle lifts 2.0 t / 2.6 t  
VZ 975821 Axle lift carriage for pit profiles with cylindrical rollers

VZ 975822 Axle lift guide rollers for pit profiles with tapered rollers  
VZ 975644 Support disc height-adjustable 60 mm (2 pcs)  
VZ 975645 Support Extension 60 mm (2 pcs.) (only in conj. with VZ 975644)  
VZ 975646 Rubber Support, Round (2 pcs) (only in conj. w. VZ 975644)

#### SUPPLEMENTARY CHARGES

VT 998045 Transportkosten Achslift  
VM 996144 Montage Achslift